

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/052114 A1

(51) International Patent Classification⁷: C12G 1/00, C12H 1/22

(21) International Application Number: PCT/AU2004/001632

(22) International Filing Date: 25 November 2004 (25.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 2003906581 28 November 2003 (28.11.2003) AU

(71) Applicant (for all designated States except US): FLEX-TANK PTY LTD [AU/AU]; 370 Yarraview Road, Yarra Glen, Victoria 3775 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FLECK-NOE-BROWN, Anthony, Earl [AU/AU]; 370 Yarraview Road, Yarra Glen, Victoria 3775 (AU). Road, Yarra Glen, Victoria 3775 (AU). UNWIN, Michael, James [AU/AU]; 2 Racecourse Road, Beaufort, Victoria 3373 (AU).

(74) Agents: PERNAT, Alfred et al.; Morcom Pernat, Suite 2, 334 Highbury Road, Mount Waverley, Victoria 3149 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: CONTROL OF OXYGENATION

(57) Abstract: A container assembly for controlling rate of oxygen transfer from the atmosphere into a liquid stored in the container assembly comprising, a container (4) with an oxygen permeability of 50ml to 300ml of oxygen per square metre of area of walls of the container for each millimeter of the thickness of the walls per 24 hour period at room temperature, a barrier member (11) for providing a barrier to limit oxygen access from head space in the container to a surface of the liquid the barrier member having a construction which causes it to float on the liquid surface, and a peripheral flange (12) surrounding the barrier member arranged so that it makes a slidably peripheral seal with the walls of the container.

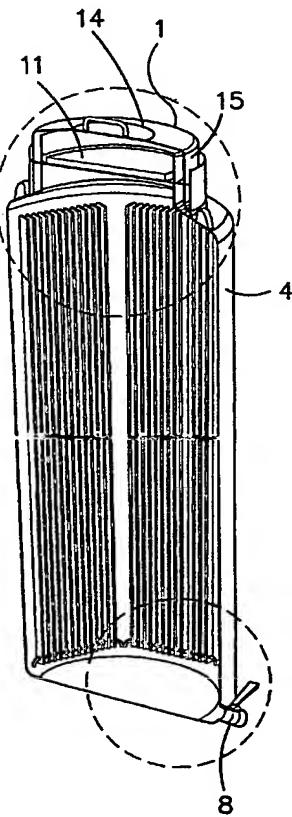

WO 2005/052114 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*